

Stainless Steel Horizontal Single Stage Centrifugal Pumps




Features

- Light structure
- High performance and energy efficiency
- Durable
- Corrosion resistant
- Low noise
- For clean non flammable or explosive liquids
- Liquid temperatures from -20C to +100C
- Altitudes up to 1000m
- Max operating pressure is 10 bar
- Guard plate, shaft, Lining of pump head, impeller and pump body all AISI304 Stainless Steel
- Complete with Base Plate



Definition of model

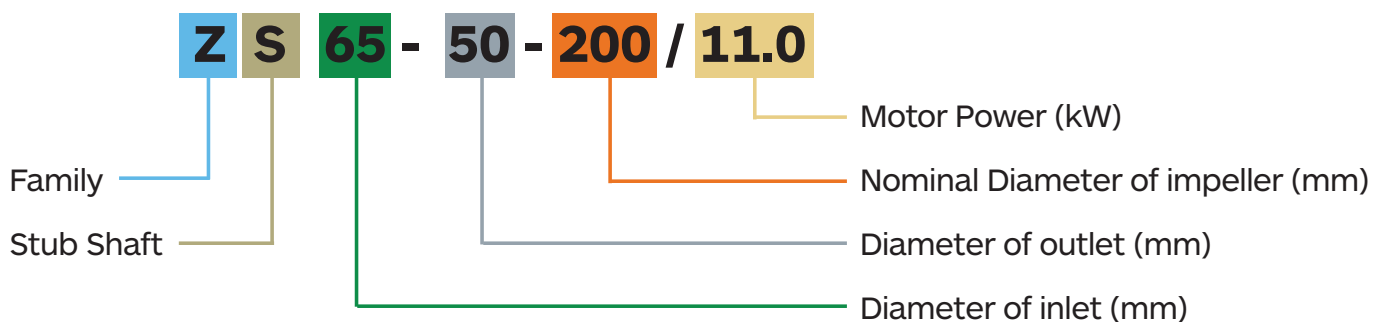

Model	Power (kW)	Q m ³ /h	3	6.3	9	12.5	15	18	20
BIA-ZS50-32-160/1.1	1.1	H (m)	18.7	18	17.2	16.4			
BIA-ZS50-32-160/1.5	1.5		22.5	22	21	20	19	18	
BIA-ZS50-32-160/2.2	2.2		28	27	26.3	25	24	22.5	
BIA-ZS50-32-200/3.0	3		34.9	34.1	33.3	32	31	29.8	28.9
BIA-ZS50-32-200/4.0	4		45.7	44.8	43.7	42	40	39	37.7
BIA-ZS50-32-200/5.5	5.5		58.5	57.2	56	54	52.5	50	48.5










Model	Power (kW)	Q m ³ /h	5	10	15	20	25	30	35	40
BIA-ZS65-40-125/1.5	1.5	H (m)	15.5	15.4	15	14.4	13	11.3		
BIA-ZS65-40-125/2.2	2.2		20	19.7	19.5	19	18	16.7	15.2	
BIA-ZS65-40-125/3.0	3		25.7	25.3	25.1	24.8	24	22.3	20.3	
BIA-ZS65-40-160/4.0	4		30	29.7	29.3	28.9	28	26.5	24.5	
BIA-ZS65-40-200/5.5	5.5		37.4	37.2	36.7	36.4	36	35.5	34.6	33.3
BIA-ZS65-40-200/7.5	7.5		48	47.5	47	46.6	46	45.2	44.5	43.3
BIA-ZS65-40-200/11.0	11	64	63.5	63	62.5	62	61.5	60.5	59	

Disclaimer: Every effort will be made to publish correct details in this brochure. No responsibility will be taken for any errors, omissions or changes. White International reserves the right to make any changes deemed necessary to specifications and performance in accordance with manufacturer's recommendations.

0800 509 506



Stainless Steel Horizontal Single Stage Centrifugal Pumps

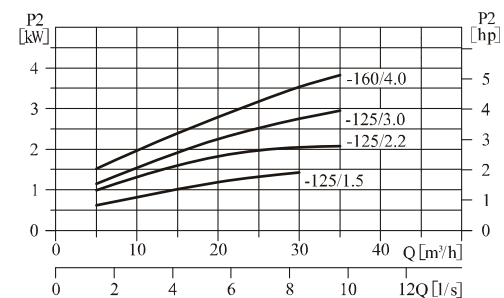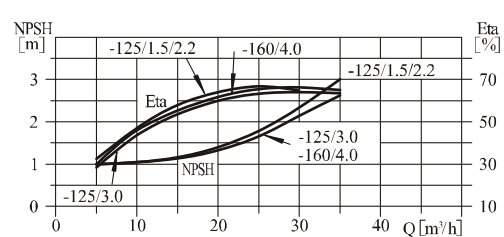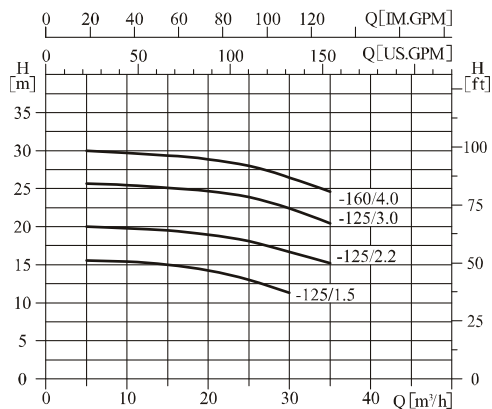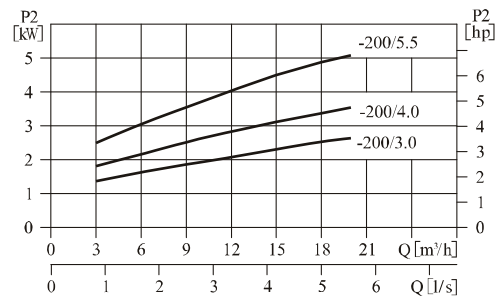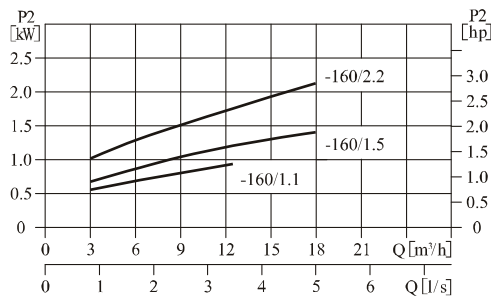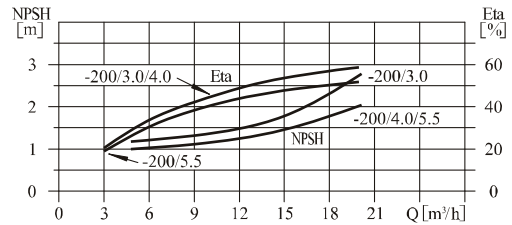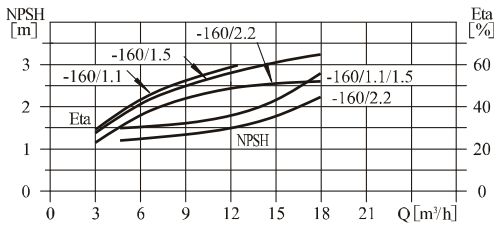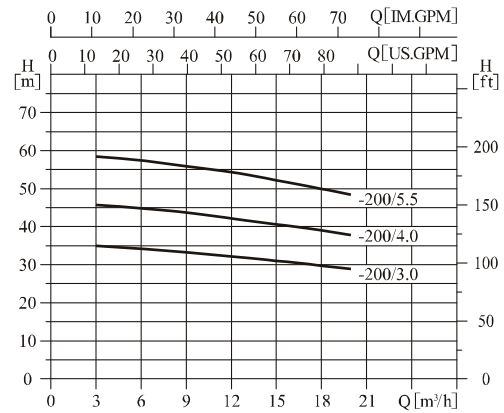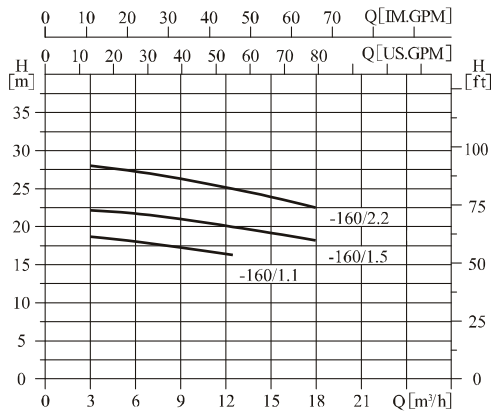

Disclaimer: Every effort will be made to publish correct details in this brochure. No responsibility will be taken for any errors, omissions or changes. White International reserves the right to make any changes deemed necessary to specifications and performance in accordance with manufacturer's recommendations.