



Shallow Well Heavy Duty Self Priming Jet Pumps



Cast Iron Jet Pumps

- For pressure boosting, irrigation, wash down from tanks, rivers and dams
- Tough pumps reliable in the toughest conditions
- Suction depths up to 8m.




M = Single phase bare pump

MP = Single phase with pressure switch

T = Three phase bare pump





Also available in pump and pressure vessel combinations

Model	Input	Out-put	Taps 	Nominal Pressure		Total Suction Head								Settings				Maximum Pump Pressure	
						0 m	0 ft	3 m	10 ft	5 m	16 ft	6 m	20 ft	Start		Stop			
	kW	kW	psi	kpa	l/m	gph	l/m	gph	l/m	gph	l/m	gph	psi	kpa	psi	kpa	psi	kpa	
DAB-151M/MP/T	1.6	1.1	8	45	310	79	1043	73	964	59	779	55	726	45	310	70	483	90	620
DAB-251M/MP/T	2.2	1.85	12	46	317	120	1584	107	1413	90	1188	79	1043	46	317	78	538	91	627
DAB-200M/MP/T	2.0	1.5	18	25	172	185	2422	170	2244	142	1875	125	1650	25	172	43	296	59	407
DAB-300M/MP/T	2.7	2.2	19	28	193	190	2508	170	2244	138	1822	120	1584	28	193	57	393	74	510

See Page 22 for pump curves



Shallow Well Heavy Duty Self Priming Jet Pumps

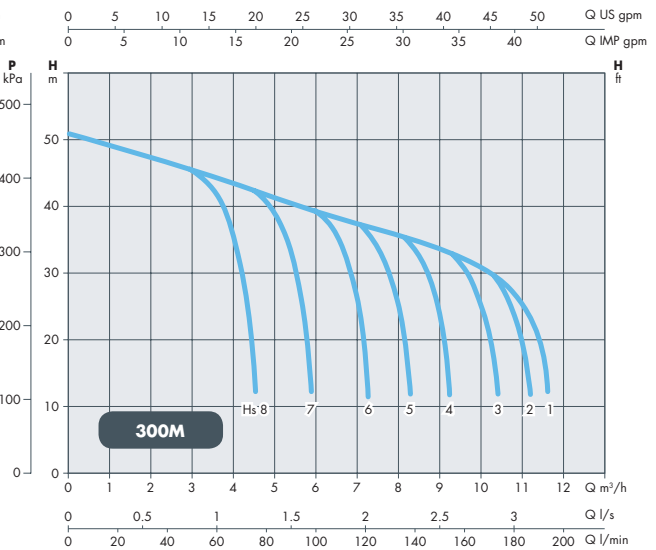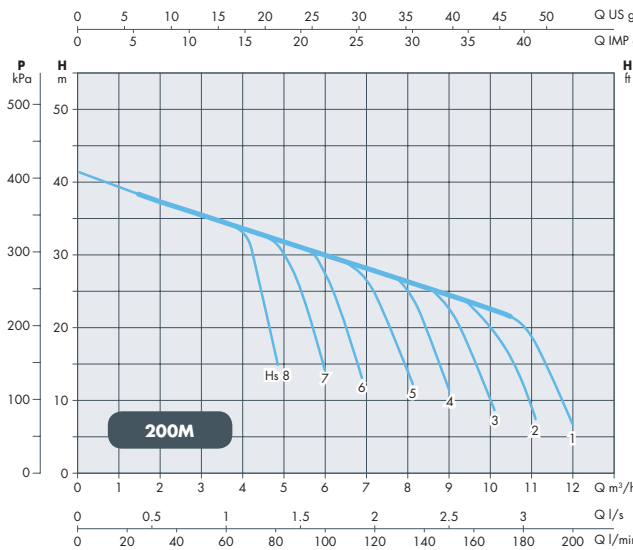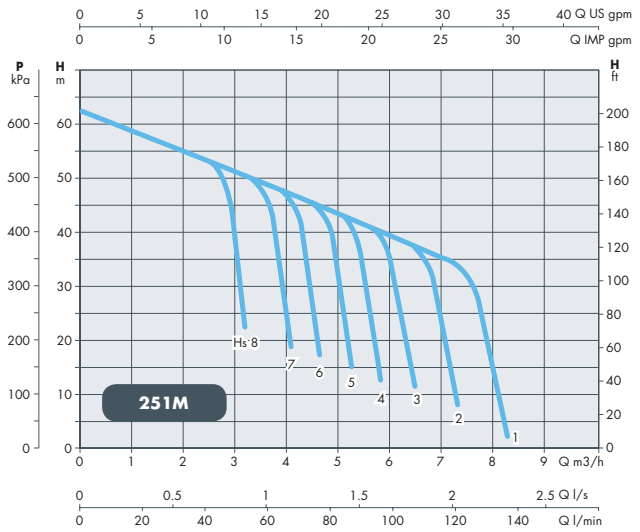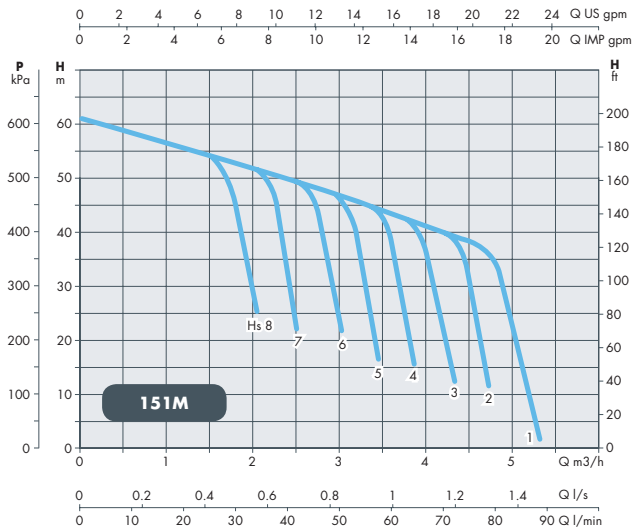

Disclaimer: Every effort will be made to publish correct details in this brochure. No responsibility will be taken for any errors, omissions or changes. White International reserves the right to make any changes deemed necessary to specifications and performance in accordance with manufacturer's recommendations.

0800 509 506





SHALLOW WELL SELECTION CHART

Model	kW hp	Total Suction Head m/ft		Delivery head (metres/feet)																
				20	66	25	82	30	98	35	115	40	131	45	148	50	164	55	180	
				Delivery head (kPa/psi)																
				196	28	245	36	294	43	343	50	392	57	441	64	489	71	538	78	
				Flow (litres/min, gallons/min)																
JET62 JETCOM62 JETINOX62	0.44 0.6	0 2 4 6 8	0 7 13 20 26	45 41 35 28 20	10 9 8 6 4	32 26 21 17 13	7 6 5 4 3	18 15 12 9 6	4 3 3 2 1	10 7 5	2 2 1									
JET82 JETCOM82 JETINOX82	0.6 0.8	0 2 4 6 8	0 7 13 20 26	60 55 43 34 27	13 12 9 7 6	44 38 33 28 22	10 8 7 6 5	30 25 20 16 13	18 15 12 9 6	7 6 4 3	4 3 2 1	10 7	2 2							
JET102 JETCOM102 JETINOX102	0.75 1.0	0 2 4 6 8	0 7 13 20 26			50 54 43 35 26	13 12 9 8 6	46 41 36 31 26	10 9 8 7 6	33 28 24 20 17	7 6 5 4 4	22 18 15 12 8	5 4 3 3 2	13 10 7	3 2 2					
JETINOX112	1.0 1.36	0 2 4 6 8	0 7 13 20 26					58 52 44 35 27	13 11 10 8 6	50 47 40 34 26	11 10 9 7 6	37 32 27 23 20	8 7 6 5 4	25 21 18 15 12	6 5 4 3 3	16 13 10 7	4 3 2 2	9 6	2 1	
JET132 JETINOX132	1.0 1.36	0 2 4 6 8	0 7 13 20 26			82 79 68 55 38	18 17 15 12 8	71 61 53 46 38	16 13 12 10 8	51 43 35 27 20	11 9 8 6 4	30 23 16 9	7 5 4 2	13 5	3 1					
JET151	1.1 1.5	0 2 4 6 8	0 7 13 20 26									68 63 56 50 45	15 14 12 11 10	54 48 43 38 30	12 11 9 8 7	40 33 27 20 11	9 7 6 4 2	25 16	6 4	
JET251	1.85 2.5	0 2 4 6 8	0 7 13 20 26									96 86 78 69 62	21 19 17 15 14	75 66 58 50 43	17 15 13 11 9	54 47 40 30 21	12 10 9 7 5	34 23 13	7 5 3	
JET200	1.5 2.0	0 2 4 6 8	0 7 13 20 26			141 123 115 88 69	31 27 25 19 15	96 48 60 44 26	21 11 13 10 6	52 36	11 8									
JET300	2.2 3.0	0 2 4 6 8	0 7 13 20 26					169 157 143 128 113	37 35 31 28 25	135 121 108 90 72	30 27 24 20 16	100 81 64 47 33	22 18 14 10 7	54 39 24	129 5					



Disclaimer: Every effort will be made to publish correct details in this brochure. No responsibility will be taken for any errors, omissions or changes. White International reserves the right to make any changes deemed necessary to specifications and performance in accordance with manufacturer's recommendations.