


### TECHNICAL DATA

<b>RATED FLOW [M3/H]</b>	15m3/hr
<b>MAX FLOW</b>	23m3/hr
<b>MAX HEAD</b>	108.1M
<b>OPTIMUM OPERATING RANGE</b>	9m3/hr @ 102.8m 47.1% eff 18.8m3/hr @ 90.7m 66.2% eff
<b>WORKING AIR TEMP</b>	0°C - 40°C
<b>LIQUID TEMPERATURE</b>	-15°C - 120°C
<b>HIGHEST EFFICIENCY</b>	69.1%
<b>MAXIMUM PUMP PRESSURE</b>	31 bar
<b>NET WEIGHT (KG)</b>	83.6kg


<b>RATED VOLTAGE/CURRENT</b>	Three phase 415V +10% - 6%
<b>RATED CURRENT</b>	13.86 amps
<b>POWER (KW)</b>	7.5kW 2 pole
<b>MOTOR IP RATING</b>	IP55
<b>MOTOR INSULATION</b>	Class F
<b>MOTOR EFFICIENCY STD</b>	I.E.3
<b>MOTOR EFFICIENCY</b>	90.1%
<b>COS Ø</b>	0.88
<b>MECHANICAL SEAL</b>	AS-L-16
<b>OUTLET DIN FLANGE</b>	DN50

### DIMENSIONS


<b>HEIGHT A</b>	414
<b>DIAMETER B</b>	259
<b>RADIUS C</b>	192

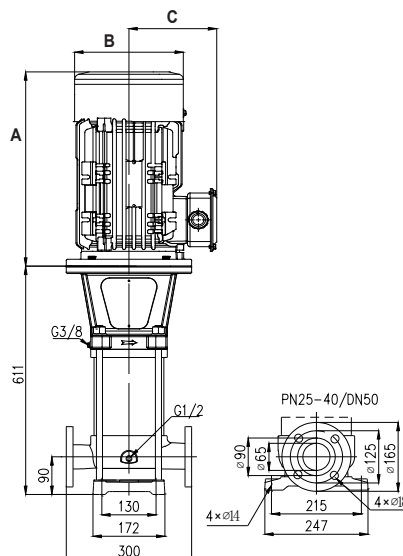


### CURVE

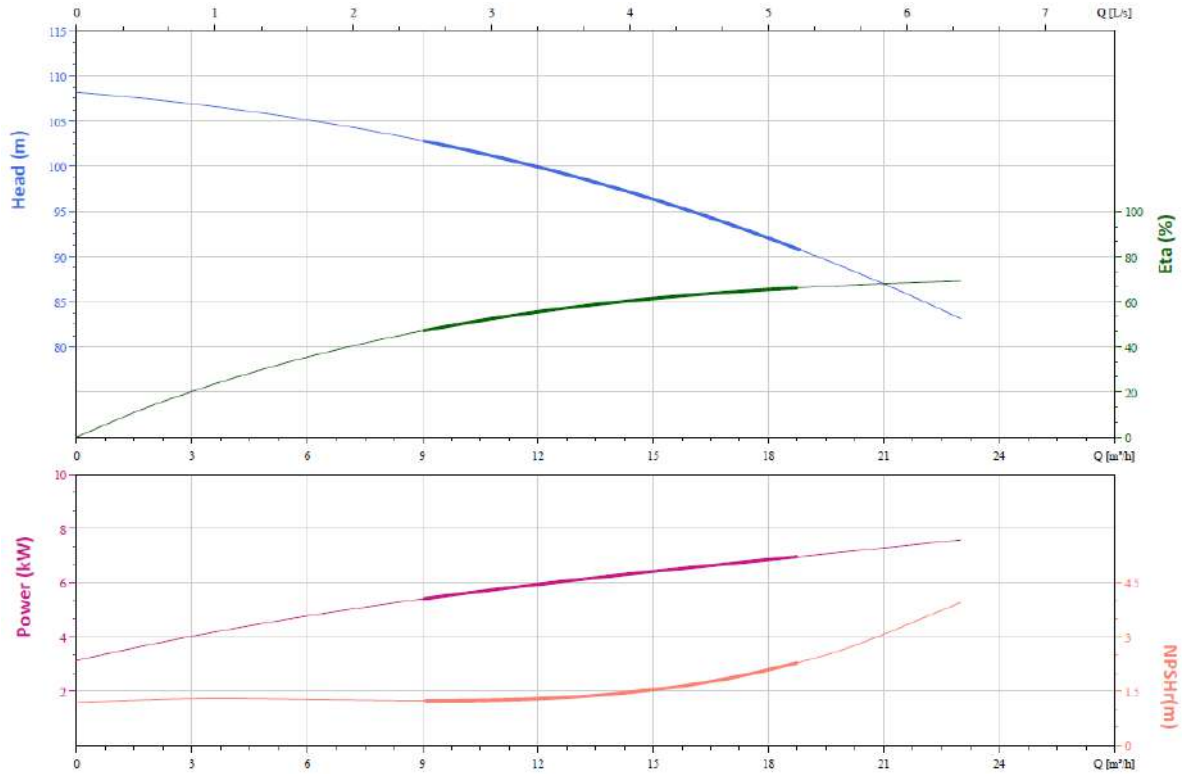


### VFD CURVE

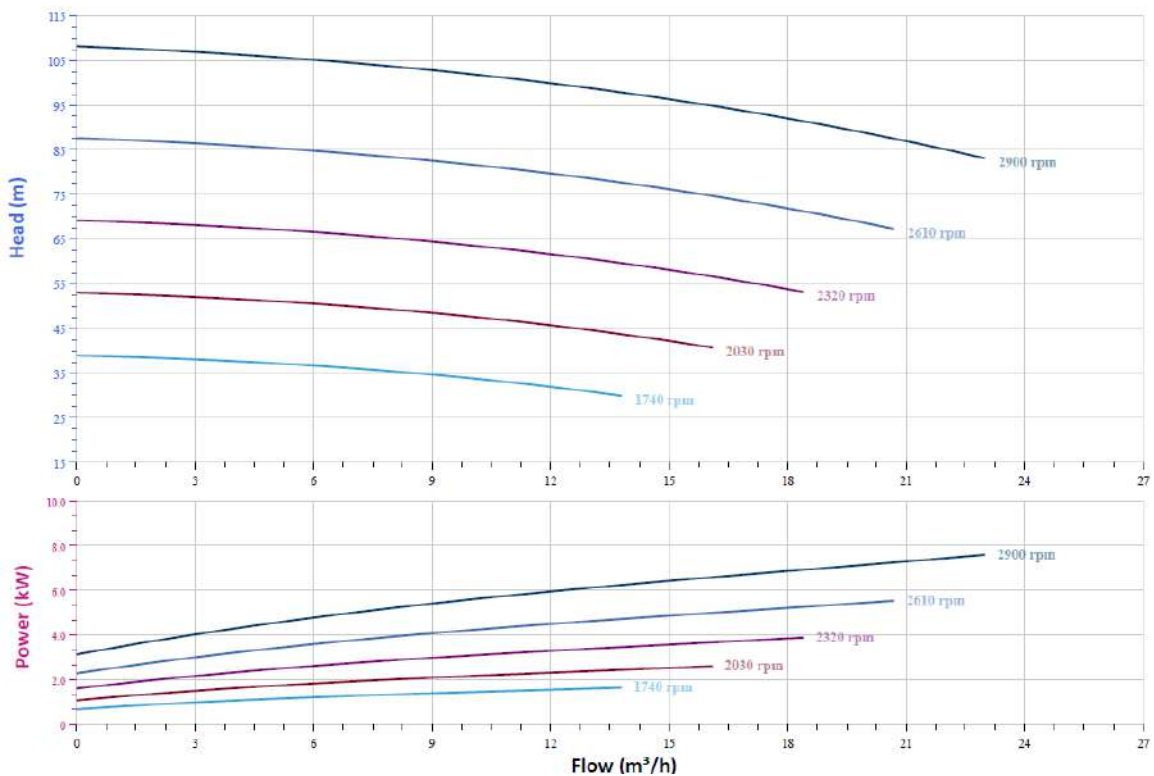


### DUAL PUMP CURVE

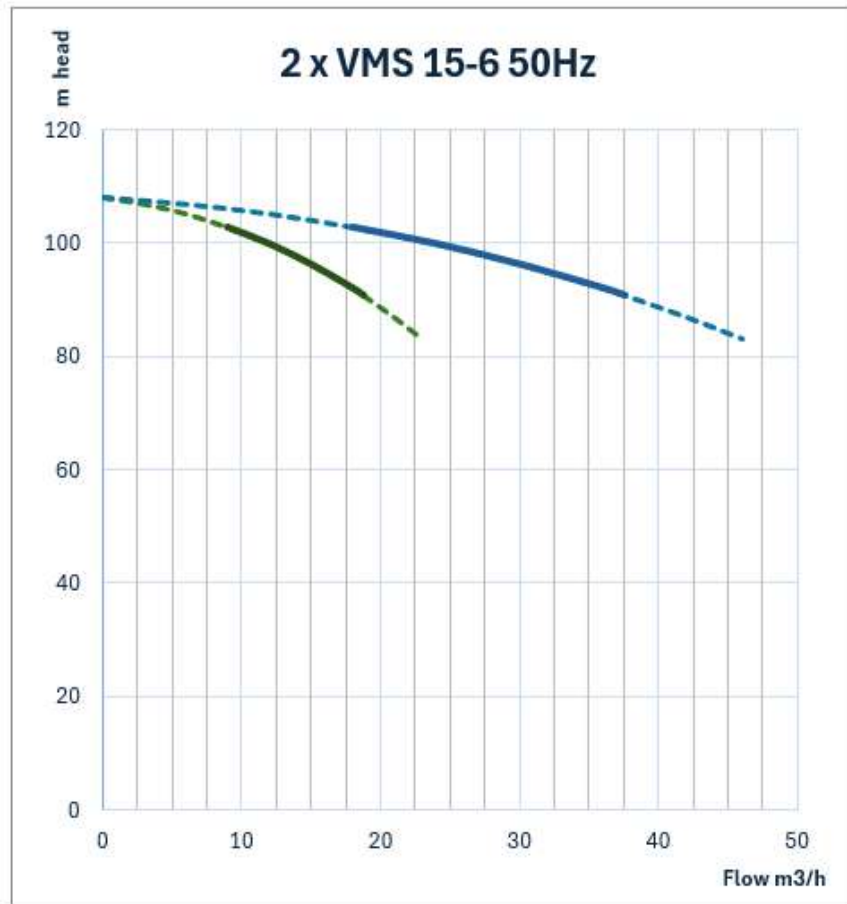

### CUTAWAY AND MATERIALS

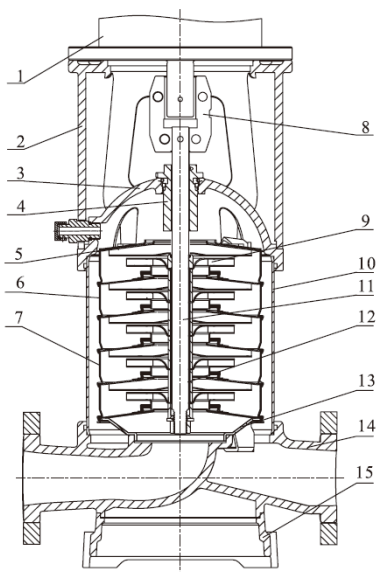

1	Motor	/
2	Bracket	Ductile Cast Iron
3	Seal Base	Stainless / Ductile Cast Iron
4	Mechanical Seal	AS-L-16
5	Top Diffuser	Stainless Steel
6	Diffuser	Stainless Steel
7	Support Diffuser	Stainless Steel
8	Coupling	Stainless Steel
9	Impeller	Stainless Steel
10	Cylinder	Stainless Steel
11	Shaft	Stainless Steel
12	Intermediate Bearing	SIC / WC
13	Inducer	Stainless Steel
14	Inlet/Outlet Chamber	Stainless Steel / Ductile Cast Iron
15	Base	Ductile Cast Iron

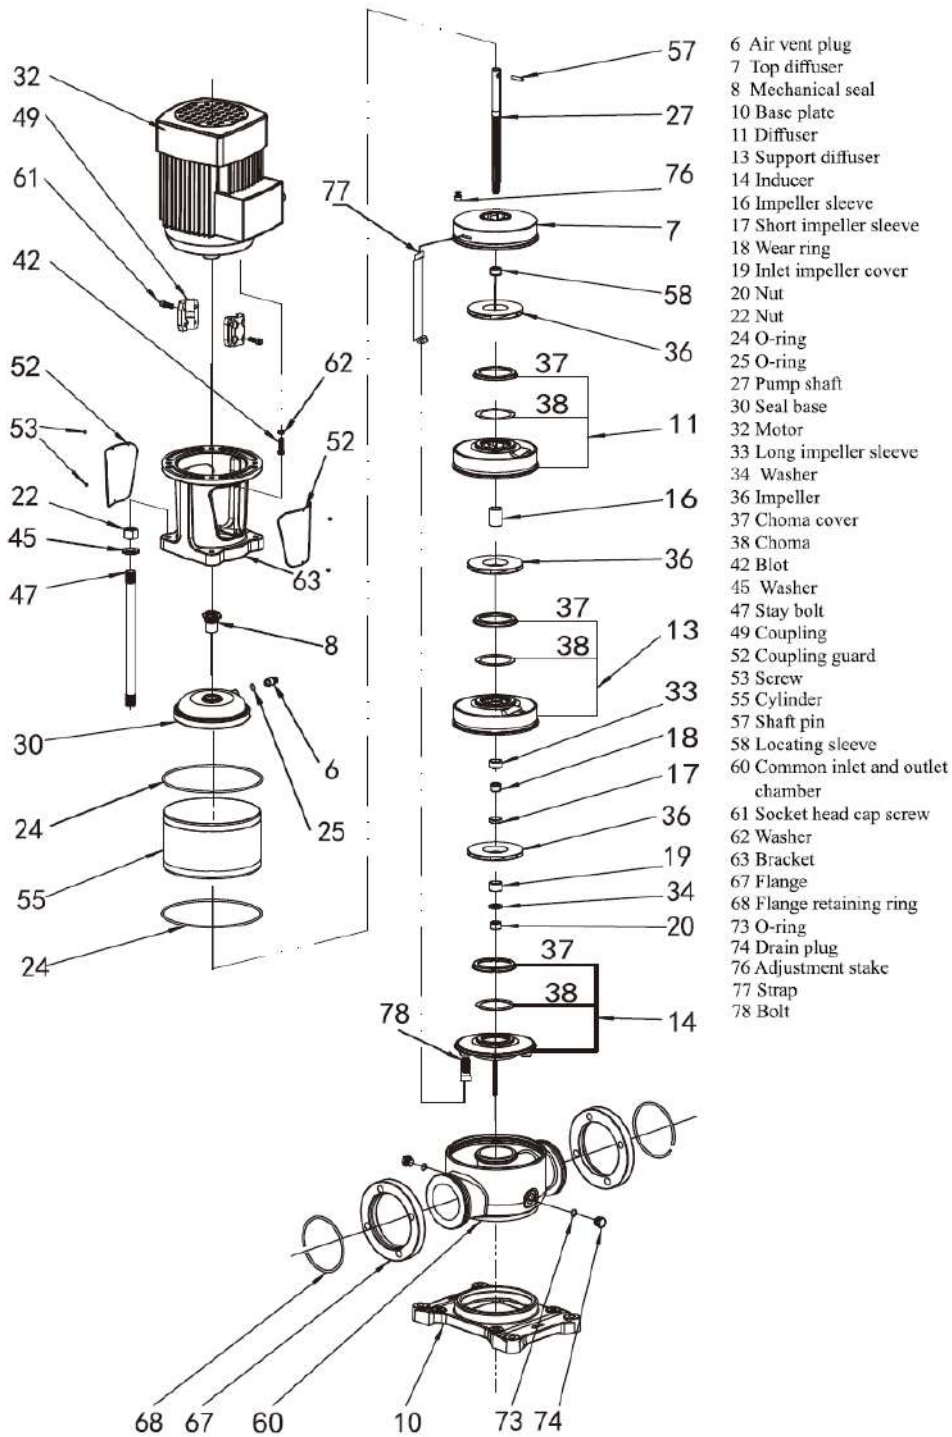

**WARRANTY / CERTIFICATIONS**

